



SR Classic BIOSAFE


Multipurpose R10 Safety Flooring




SCBS408



SCBS409




SCBS410




SCBS411




SCBS412




SCBS413




SCBS414




SCBS415




SCBS416



SCBS417



SCBS418



SCBS419




SCBS420



SCBS421



SCBS422



SCBS423


*SR Classic BIOSAFE incorporates **Biosafe** antimicrobial throughout the wear layer providing a lifetime of antimicrobial performance which is proven to reduce the growth of the most common bacteria by up to 99.99%

SR Classic BIOSAFE

Multipurpose R10 Safety Flooring

Description

High Specification R10 Safety Flooring
 Suitable for use in all Dry and Wet areas where there is a requirement for wear and slip resistance
 Available in 1.8, 2 and 2.5mm thickness and Classic SD version for greater Static Performance (where required)

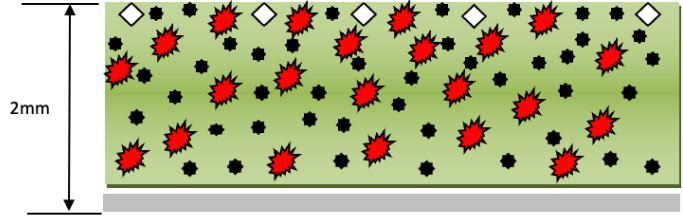

Technical

SR Classic BIOSAFE is available with the following performance attributes. Please advise your specific requirements so we can offer the corresponding performance level product for your needs

Flooring Type		EN 13845	Safety Flooring
Roll Dimensions		EN ISO 24341	2.0m x 20m = 40m ²
Overall Thickness		EN ISO 24346	1.8mm 2.0mm 2.5mm
Weight		EN ISO 23997	2.25kgs 2.45kgs 3.10kgs
Classification		EN 13845 EN 685	34 & 43
Indentation		EN ISO 24343-1	≤0.10mm
Wear Resistance		EN 13845 Annex D	≤10%particles lost over 50,000 cycles
SLIP RESISTANCE		EN 13845 Annex C CEN/TS 16165:2016 (96 & 57) EN 13893 DIN 51130	ESf ≥36 DS R10
Flexibility		ISO 24344 Method A	PASS 20mm Mandrel
Dimensional Stability		EN ISO 23999	<0.4%
Chemical Resistance		EN ISO 26987	Good
Colour Fastness		EN ISO 105-B02 Method 3	≥6
FIRE Performance		EN 13501-1 ISO 9239-1 ISO 11925-2	Class Bfl-s1 Critical Radiant Flux≥8kW/m ² PASS
Electrical Behaviour		EN 1815 EN 1081	< 2kV PASS ≤ 10 ⁷ Ω (SR Classic SD)
Castor chair test		EN 425	PASS
Seam Strength		EN 684	PASS
Thermal Conductivity (Underfloor Heating)		EN ISO 12667	Suitable
TVOC Emissions after 28 Days		EN ISO 16000-9	< 40 μ/m ³
CE Marking		EN 14041	CE Marking
Antimicrobial		ISO-22196-2011	Growth reduction up to 99.99%

Precautions

FloorXL products are not suitable for areas subjected to regular and extended exposure to rubber matting, certain solvents, organic dyes or floor maintenance products containing pine oil. Contact with rubber tyres and lighted cigarette butts may also damage the products. For further details please check our Installation/maintenance Guides or contact your FloorXL representative