



FloorXL

SR Classic EXTRA

Heavy Duty R11/12 Safety Flooring

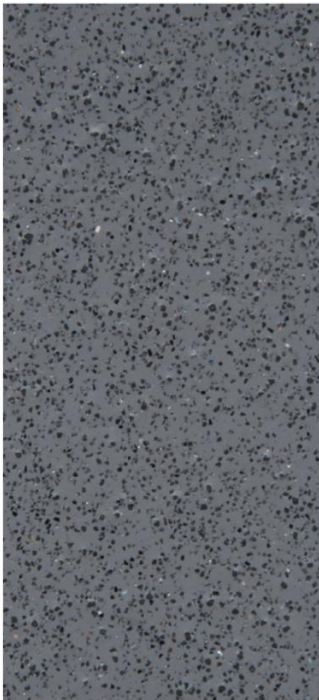


SCX409-11/SCX409-12

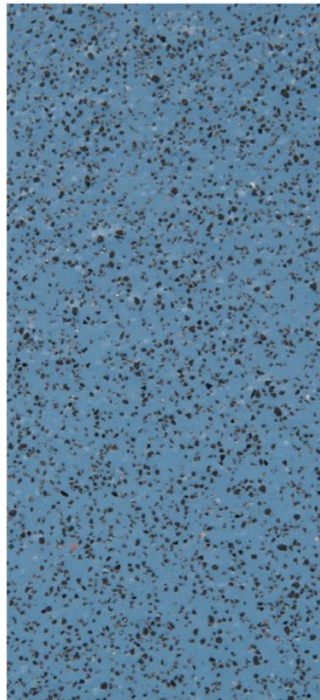

SCX410-11/SCX410-12




SCX412-11/SCX412-12

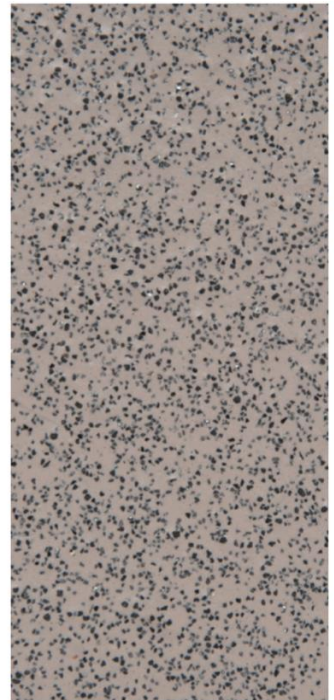

SCX415-11/SCX415-12



Texture comparison: SCX415-11 = R11

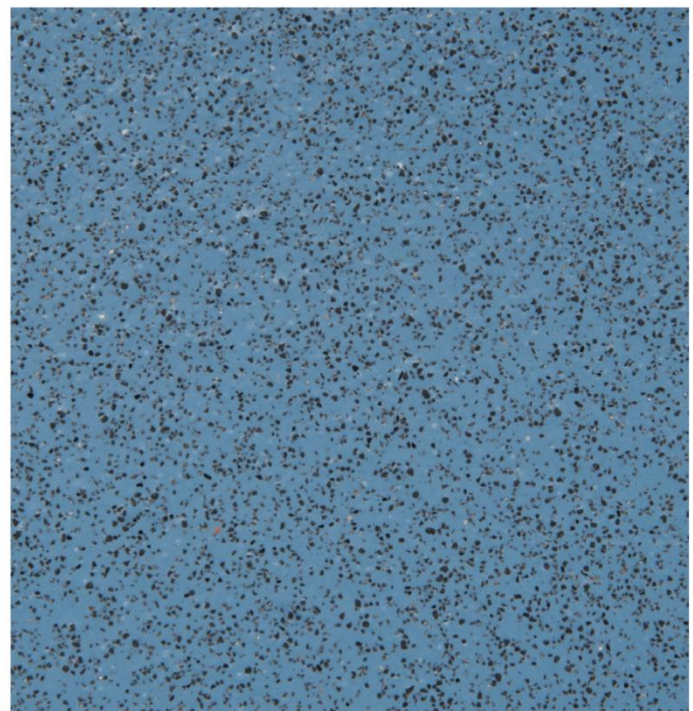

Texture comparison: SCX410-12 = R12

*SR Classic EXTRA is also available in **Biosafe version** – with antimicrobial throughout the wear layer which is proven to reduce the growth of the most common bacteria by up to 99.99%


N.B. Samples are representative of the actual product but exact colour matching may not be guaranteed. Information correct at the time of printing.

SR Classic EXTRA

Heavy Duty R11/12 Safety Flooring

Description

Heavy Duty R11/12 Safety Flooring
 Specially designed for use in areas where extra slip resistance is required (wet areas and commercial kitchens)
 Available in 2 and 2.5mm thickness

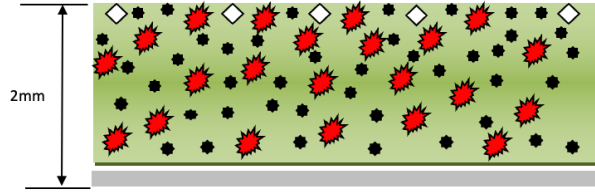

Technical

SR Classic EXTRA is available with the following performance attributes. Please advise your specific requirements so we can offer the corresponding performance level product for your needs

Flooring Type		EN 13845	Safety Flooring
Roll Dimensions		EN ISO 24341	2.0m x 20m = 40m ²
Overall Thickness		EN ISO 24346	2.0mm 2.5mm
Weight		EN ISO 23997	2.45kgs 3.10kgs
Classification		EN 13845 EN 685	34 & 43
Indentation		EN ISO 24343-1	≤0.10mm
Wear Resistance		EN 13845 Annex D	≤10%particles lost over 50,000 cycles
SLIP RESISTANCE		EN 13845 Annex C CEN/TS 16165:2016 (96 & 57) EN 13893 DIN 51130 AS 4586 App D	ESf ≥36 DS R11/R12 R11/R12
Flexibility		ISO 24344 Method A	PASS 20mm Mandrel
Dimensional Stability		EN ISO 23999	<0.4%
Chemical Resistance		EN ISO 26987	Good
Colour Fastness		EN ISO 105-B02 Method 3	≥6
FIRE Performance		EN 13501-1 ISO 9239-1 ISO 11925-2	Class Bfl-s1 Critical Radiant Flux≥8kW/m ² PASS
Electrical Behaviour		EN 1815	< 2kV PASS
Castor chair test		EN 425	PASS
Seam Strength		EN 684	PASS
Thermal Conductivity (Underfloor Heating)		EN ISO 12667	Suitable
TVOC Emissions after 28 Days		EN ISO 16000-9	< 40 µ/m ³
CE Marking		EN 14041	CE Marking
Antimicrobial		ISO-22196-2011	Growth reduction up to 99.99%

Precautions

FloorXL products are not suitable for areas subjected to regular and extended exposure to rubber matting, certain solvents, organic dyes or floor maintenance products containing pine oil. Contact with rubber tyres and lighted cigarette butts may also damage the products. For further details please check our Installation/maintenance Guides or contact your FloorXL representative