



SR Classic SPA

Multipurpose Safety Flooring


Wet & Dry - Shoe & Barefoot use

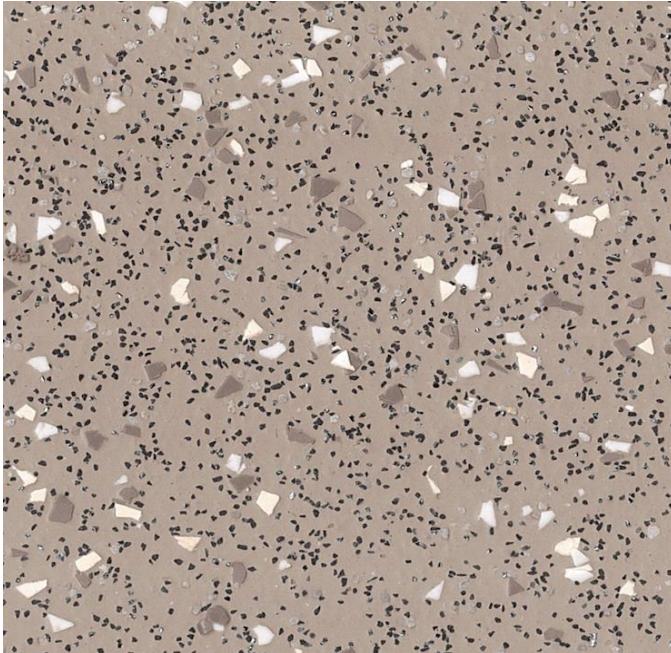


SPA541

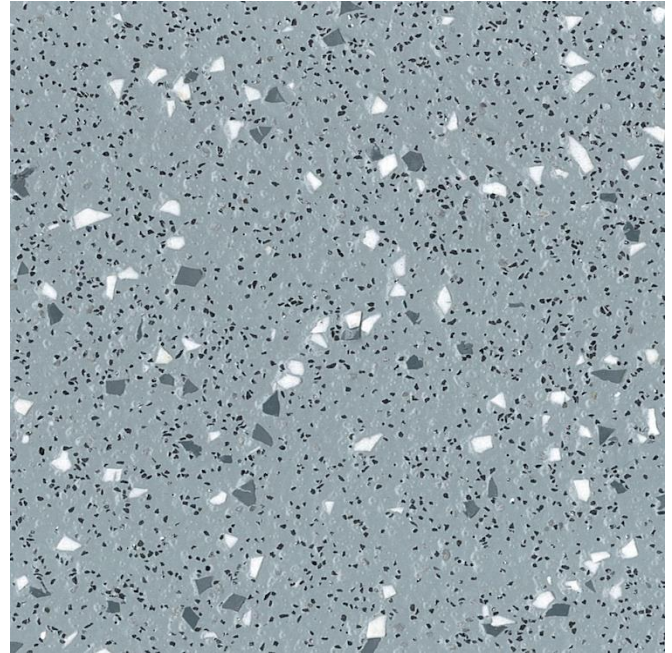

SPA542

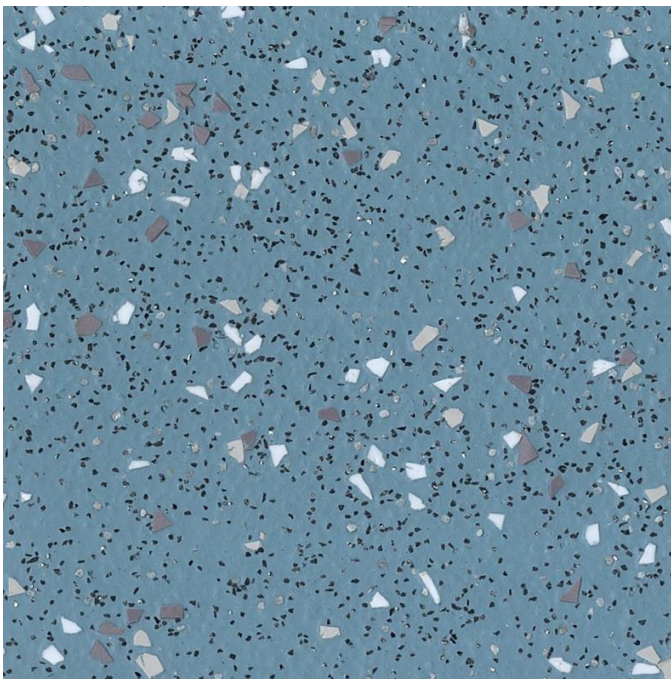

SPA543

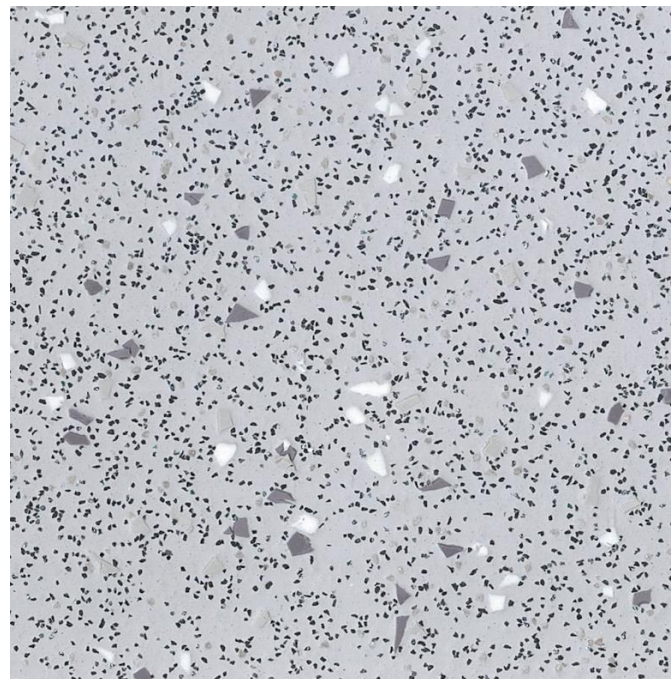

SPA544

* The Shoe & Barefoot slip performance of FloorXL SR Classic SPA is contained throughout the wear layer unlike others whose performance is restricted to PU surface coatings which will wear-off in time


*SR Classic SPA is also available in **Biosafe version** – with antimicrobial throughout the wear layer which is proven to reduce the growth of the most common bacteria by up to 99.99%

SR Classic SPA

Multipurpose Safety Flooring Wet & Dry – Shoe & Barefoot use

Description

SR Classic SPA Safety Flooring
Specially designed for use in wet and dry areas where slip resistance is required for shoe and barefoot use
Available in 2mm thickness

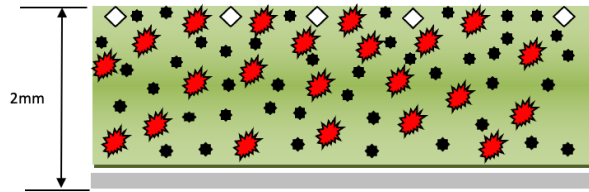

Technical

SR Classic SPA is available with the following performance attributes. Please advise your specific requirements so we can offer the corresponding performance level product for your needs

Flooring Type		EN 13845	Safety Flooring
Roll Dimensions		EN ISO 24341	2.0m x 20m = 40m ²
Overall Thickness		EN ISO 24346	2.0mm
Weight		EN ISO 23997	2.45kgs
Classification		EN 13845 EN 685	34 & 43
Indentation		EN ISO 24343-1	≤0.10mm
Wear Resistance		EN 13845 Annex D	≤10%particles lost over 50,000 cycles
SLIP RESISTANCE		EN 13845 Annex C CEN/TS 16165:2016 (96 & 57) EN 13893 DIN 51130 AS 4586 App D/App C	ESf /ESb ≥36 DS R11 R11/Class C
Flexibility		ISO 24344 Method A	PASS 20mm Mandrel
Dimensional Stability		EN ISO 23999	<0.4%
Chemical Resistance		EN ISO 26987	Good
Colour Fastness		EN ISO 105-B02 Method 3	≥6
FIRE Performance		EN 13501-1 ISO 9239-1 ISO 11925-2	Class Bfl-s1 Critical Radiant Flux≥8kW/m ² PASS
Electrical Behaviour		EN 1815	< 2kV PASS
Castor chair test		EN 425	PASS
Seam Strength		EN 684	PASS
Thermal Conductivity (Underfloor Heating)		EN ISO 12667	Suitable
TVOC Emissions after 28 Days		EN ISO 16000-9	< 40 µ/m ³
CE Marking		EN 14041	CE Marking
Antimicrobial		ISO-22196-2011	Growth reduction up to 99.99%

Precautions

FloorXL products are not suitable for areas subjected to regular and extended exposure to rubber matting, certain solvents, organic dyes or floor maintenance products containing pine oil. Contact with rubber tyres and lighted cigarette butts may also damage the products. For further details please check our Installation/maintenance Guides or contact your FloorXL representative