
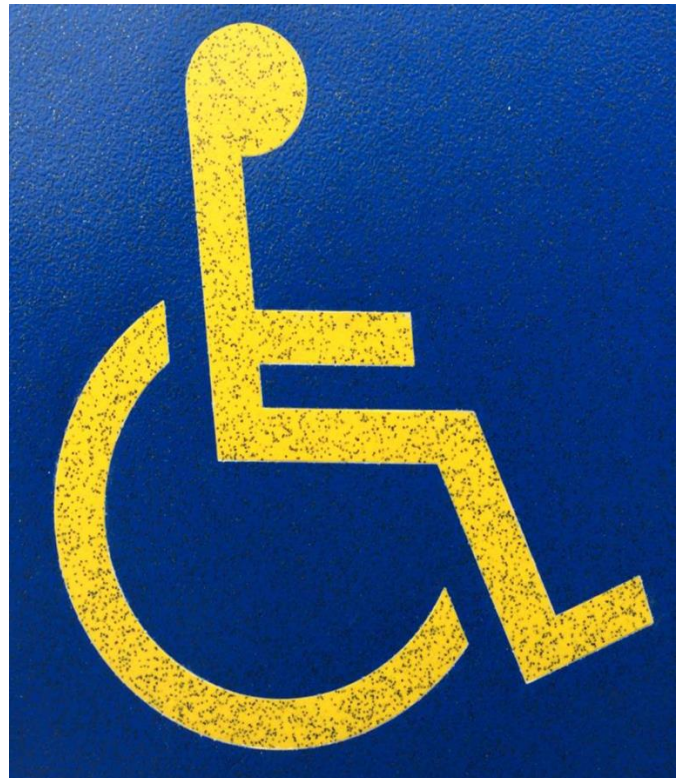


FloorXL

# SR Prime BUSTILE

**One-piece Printed Tiles for Transit**

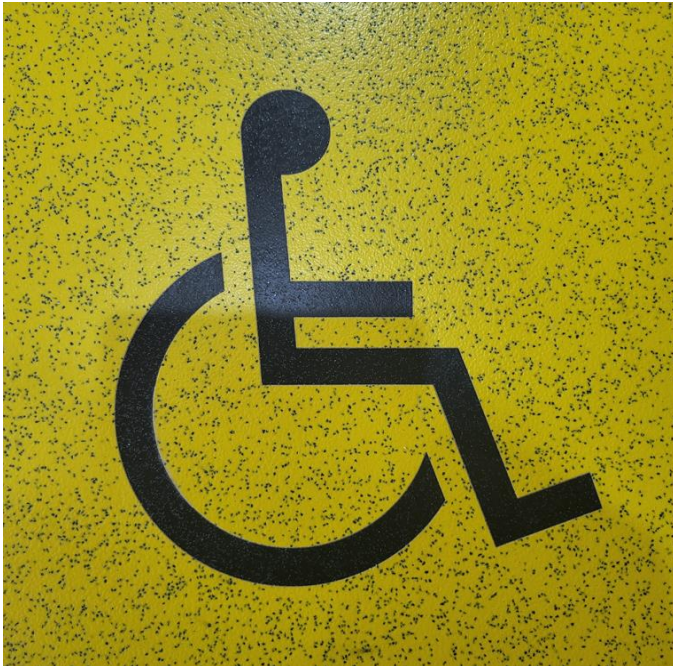

Send us your designs and we will produce one-piece printed tiles with a one-piece clear wear layer that will not allow ingress of water – no matter how intricate the design or logo!


N.B. Samples are representative of the actual product but exact colour matching may not be guaranteed. Information correct at the time of printing.

# SR Prime BUSTILE

## One-piece Printed Tiles for Transit

### Description

One-piece tile made from highly flexible virgin PVC with Silicon Carbide and Aluminium Oxide dispersed all the way through the 0.7 mm of wear layer over the printed symbol or lettering of your design. Glass fibre reinforcement and Non-Woven Polyester Felt or Cellulose backing for dimensional stability and enhanced bond strength.

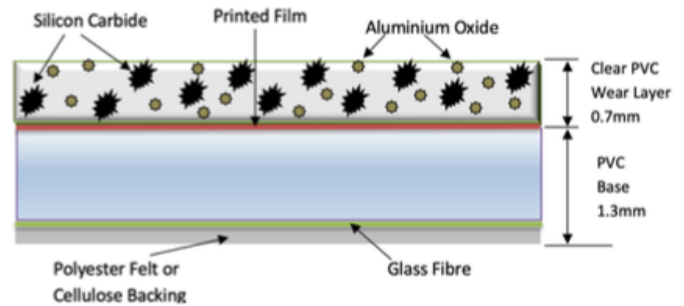

### Technical

SR Prime BUSTILE is available with the following performance attributes. Please advise your specific requirements so we can offer the corresponding performance level product for your needs

Flooring Type		EN 13845	Safety Flooring
Roll Dimensions		EN ISO 24341	2.0m x 20m = 40m <sup>2</sup>
Overall Thickness		EN ISO 24346	2.0mm 2.5mm
Weight		EN ISO 23997	2.45kgs 3.10kgs
Indentation		EN ISO 24343-1	≤0.10mm
Wear Resistance		EN 13845 Annex D	≤10%particles lost over 50,000 cycles
SLIP RESISTANCE		EN 13845 Annex C CEN/TS 16165:2016 (96 & 57) EN 13893 DIN 51130 AS 4586 App D	ESf ≥36 DS R10 R10
Colour Fastness		EN ISO 105-B02 Method 3	≥6
FIRE Performance		EN 13501-1 ISO 9239-1 ISO 11925-2	Class Bfl-s1 Critical Radiant Flux≥8kW/m <sup>2</sup> PASS
Electrical Behaviour		EN 1815 EN 1081	< 2kV PASS ≤ 10 <sup>9</sup> Ω
Castor chair test		EN 425	PASS
Seam Strength		EN 684	PASS
Thermal Conductivity (Underfloor Heating)		EN ISO 12667	Suitable
TVOC Emissions after 28 Days		EN ISO 16000-9	< 40 μ/m <sup>3</sup>
CE Marking		EN 14041	CE Marking

### Precautions

FloorXL products are not suitable for areas subjected to regular and extended exposure to certain solvents, organic dyes or floor maintenance products containing pine oil. Contact with rubber mats, tyres and lighted cigarette butts may also damage the products. For further details please check our Installation/maintenance Guides or contact your FloorXL representative