


# **SR Prime RUBBER**



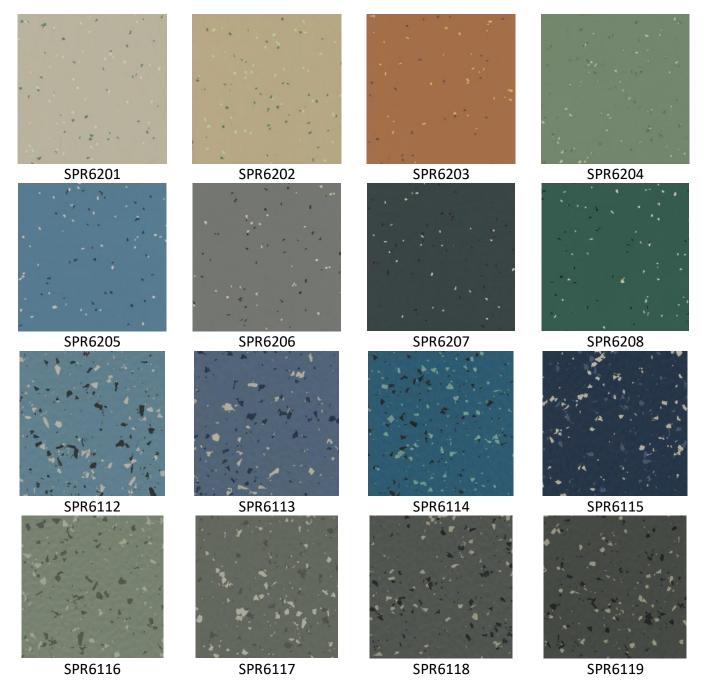

## **SR Prime RUBBER**

### **Homogeneous Rubber Flooring**

#### Description

High Specification R9 Resilient Rubber Flooring

Suitable for use in all Dry and Wet areas in Airports, Railway Stations, Rolling Stock and Shipping

Available in following format:

SPR6201 to SPR6208 = Sheet 1.22m x 15m in 2.0, 3.0 and 3.5mm thickness

SPR6112 to SPR6119 = Tile 1m x 1m in 3.0 and 3.5mm thickness

#### Warranty

The flooring Warranty period is subject to specific use and to the products being specified, installed and maintained in accordance with our recommendations (copies available on request) Please provide details so we can confirm

#### **Technical**

SR Prime RUBBER is available with the following performance attributes. Please advise your specific requirements so we can offer the corresponding performance level product for your needs

Dimensional Stability	~ Z	EN434:1994	PASS	
Residual Indentation		EN434:1994	PASS	
Wear Resistance		ISO 4649:2017	PASS	
SLIP RESISTANCE	96	Din 51130:2014	R9	
Curl		EN434:1994	PASS	
Flexibility		EN434:1994	PASS	
Stain Resistance	<b>\$</b>	EN ISO 26987: 2012	PASS	
Colour Fastness	<b>\$</b>	EN ISO 105-B02:2014	PASS	
FIRE Performance		GB8624-2012	B1	
Resistance to Cigarette Burn	***	EN 1399:1997	PASS	
Content Analysis of soluble Heavy Metals		GB18586:2001	PASS	
Shore Hardness	HR	ISO7619-1:2004	PASS	
Nitrosamines	R <sub>2</sub> N-N=O	EN71-12:2016	PASS	

#### **Precautions**

FloorXL products are not suitable for areas subjected to regular and extended exposure to certain solvents, organic dyes or floor maintenance products containing pine oil. Contact with rubber tires and lighted cigarette butts may also damage the products. For further details please check our Installation/maintenance Guides or contact your FloorXL representative