



SR Prime STANDARD


Multipurpose R10 Safety Flooring



SPS395




SPS429




SPS465




SPS287




SPS406




SPS439




SPS301




SPS432




SPS484



SPS280




SPS431




SPS481




SPS479



SPS396



SPS389




SPS358

SR Prime STANDARD

Multipurpose R10 Safety Flooring

Description

High Performance R10 Safety Flooring
 Suitable for Transit applications where Ease of cleaning
 Wear and Slip resistance are fundamental requirements
 Available in 1.8, 2 and 2.5mm thickness

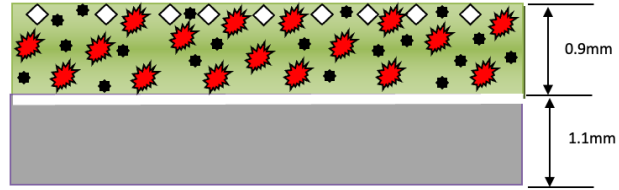

Technical

SR Prime STANDARD is available with the following performance attributes. Please advise your specific requirements so we can offer the corresponding performance level product for your needs

Flooring Type		EN 13845	Safety Flooring
Roll Dimensions		EN ISO 24341	2.0m x 20m = 40m ²
Overall Thickness		EN ISO 24346	1.8mm 2.0mm 2.5mm
Weight		EN ISO 23997	2.25kgs 2.45kgs 3.10kgs
Classification		EN 13845 EN 685	34 & 43
Indentation		EN ISO 24343-1	≤0.10mm
Wear Resistance		EN 13845 Annex D	≤10%particles lost over 50,000 cycles
SLIP RESISTANCE		EN 13845 Annex C CEN/TS 16165:2016 (96 & 57) EN 13893 DIN 51130 AS 4586 App D	ESf ≥36 DS R10 R10
Flexibility		ISO 24344 Method A	PASS 20mm Mandrel
Dimensional Stability		EN ISO 23999	<0.4%
Chemical Resistance		EN ISO 26987	Good
Colour Fastness		EN ISO 105-B02 Method 3	≥6
FIRE Performance		EN 13501-1 ISO 9239-1 ISO 11925-2	Class Bfl-s1 Critical Radiant Flux≥8kW/m ² PASS
Electrical Behaviour		EN 1815 EN 1081	< 2kV PASS ≤ 10 ⁹ Ω
Castor chair test		EN 425	PASS
Seam Strength		EN 684	PASS
Thermal Conductivity (Underfloor Heating)		EN ISO 12667	Suitable
TVOC Emissions after 28 Days		EN ISO 16000-9	< 40 μ/m ³
CE Marking		EN 14041	CE Marking

Precautions

FloorXL products are not suitable for areas subjected to regular and extended exposure to rubber matting, certain solvents, organic dyes or floor maintenance products containing pine oil. Contact with rubber tyres and lighted cigarette butts may also damage the products. For further details please check our Installation/maintenance Guides or contact your FloorXL representative