

# SR Classic WOOD

**Heterogeneous R9/10 sheet Flooring**



SCW768



SCW762



SCW769



SCW765



SCW761



SCW763



SCW766




SCW767

# SR Classic WOOD

## Heterogeneous sheet Flooring

### Description

High Specification R9/R10 Resilient Flooring  
 Suitable for use in all Dry and Wet areas where there is a requirement for wear and slip resistance  
 Available in 2.0 and 2.5mm thickness

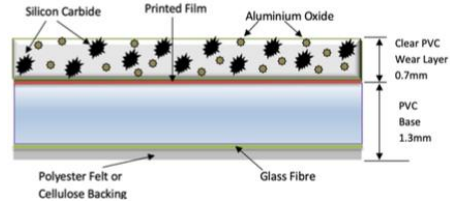

### Technical

SR Classic WOOD is available with the following performance attributes. Please advise your specific requirements so we can offer the corresponding performance level product for your needs

Flooring Type		EN 13845	Safety Flooring
Roll Dimensions		EN ISO 24341	2.0m x 20m = 40m <sup>2</sup>
Overall Thickness		EN ISO 24346	2.0mm 2.5mm
Weight		EN ISO 23997	2.45kgs 3.10kgs
Classification		EN 13845 EN 685	34 & 43
Indentation		EN ISO 24343-1	≤0.10mm
Wear Resistance		EN 13845 Annex D	≤10%particles lost over 50,000 cycles
SLIP RESISTANCE		EN 13845 Annex C CEN/TS 16165:2016 (96 & 57) EN 13893 DIN 51130	ESf ≥36 DS R9 or R10
Flexibility		ISO 24344 Method A	PASS 20mm Mandrel
Dimensional Stability		EN ISO 23999	<0.4%
Chemical Resistance		EN ISO 26987	Good
Colour Fastness		EN ISO 105-B02 Method 3	≥6
FIRE Performance		EN 13501-1 ISO 9239-1 ISO 11925-2	Class Bfl-s1 Critical Radiant Flux≥8kW/m <sup>2</sup> PASS
Electrical Behaviour		EN 1815 EN 1081	< 2kV PASS ≤ 10 <sup>7</sup> Ω (SR Classic SD)
Castor chair test		EN 425	PASS
Seam Strength		EN 684	PASS
Thermal Conductivity (Underfloor Heating)		EN ISO 12667	Suitable
TVOC Emissions after 28 Days		EN ISO 16000-9	< 40 μ/m <sup>3</sup>
CE Marking		EN 14041	CE Marking

### Precautions

FloorXL products are not suitable for areas subjected to regular and extended exposure to certain solvents, organic dyes or floor maintenance products containing pine oil. Contact with rubber mats, tyres and lighted cigarette butts may also damage the products. For further details please check our Installation/maintenance Guides or contact your FloorXL representative